

N 30, CANOPY COOKER HOOD, 75 CM, SILVER
METALLIC
D5855X1GB



Z5155X0	Standard odor filter
Z5552X0	Installation kit for canopy

Canopy hood: designed to fit neatly under an overhead unit or cabinet. They're discreet and effectively use valuable space.

- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED Lighting – Clear illumination while you cook.
- ✓ High extraction rate - for continuously clean air in the kitchen.
- ✓ Reduced Noise: our optimised motor guarantees a quiet cooking experience.

Typology: Built-in/Built-under
Length electrical supply cord: 130.0 cm
Min. required niche size for installation (HxWxD): 255mm x 700.0mm x 350mm mm
Minimum distance above an electric hob: 650 mm
Minimum distance above a gas hob: 650 mm
Net weight: 9.3 kg
Type of control: mechanical
Number of speed settings: 3-stages + intensive setting
Maximum output air extraction: 379 m³/h
Boost position output recirculating: 408.0 m³/h
Maximum output recirculating air: 278 m³/h
Boost position air extraction: 638 m³/h
Maximum Air flow: 379 m³/h
Number of lights: 2
Noise level: 56 dB(A) re 1pW
Diameter of air outlet: 120 / 150 mm
Grease filter material: Washable aluminium
EAN code: 4242004237150
Connection Rating: 206 W
Voltage: 220-230 V
Frequency: 50 Hz
Plug type: GB plug
Installation typology: Built-in



N 30, CANOPY COOKER HOOD, 75 CM, SILVER
METALLIC
D5855X1GB

Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 Ø 15 cm:
- max. Normal use 379 m³/h
- Intensive 638 m³/h
- Noise max. Normal Level: Noise, max. speed in normal use: 56 dB dB*

Features

- Slide control operation
- 3 speeds plus intensive
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 metal grease filter cassettes

Design

- For installation in a chimney or unit, above a hob
- Canopy hood
- Mechanical controls

Performance/technical information


- Suitable for ducted extraction and recirculation
- For recirculated extraction charcoal filter (accessory) needed
- Max. extraction rate: 638 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 56 dB(A) re 1 pW
- Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 410 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 730 x 380 mm
- Dimensions recirculating (HxWxD): 255-255 x 730 x 380 mm
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 81.2 kWh/year*

Optional accessories


- Recirculating kit Z5155X0

* In accordance with the EU-Regulation No 65/2014


N 30, CANOPY COOKER HOOD, 75 CM, SILVER
METALLIC
D5855X1GB

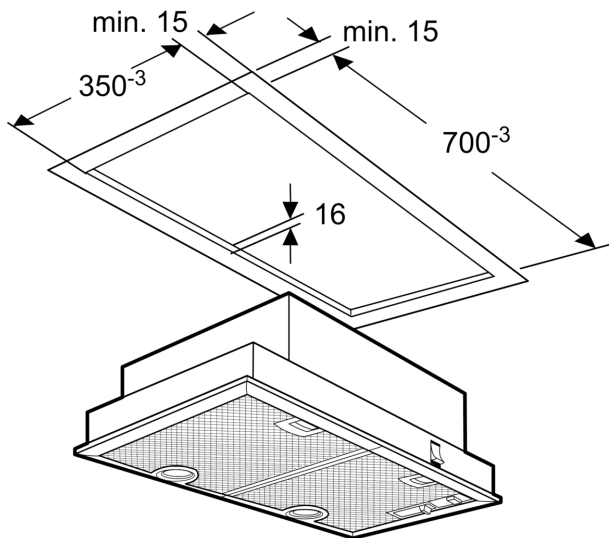


measurements in mm

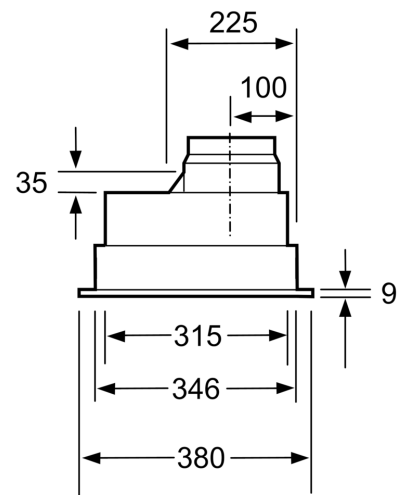

measurements in mm

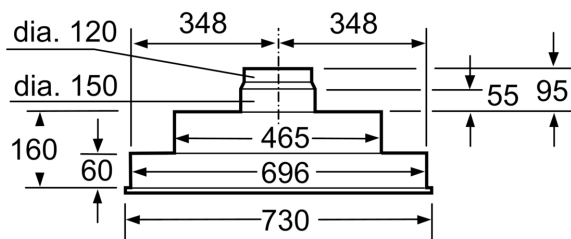

measurements in mm

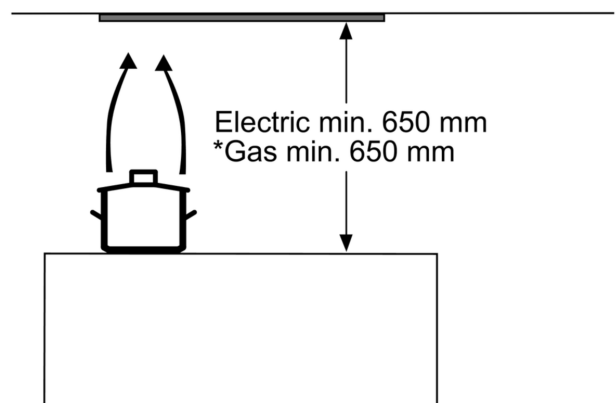

* from upper edge of pan support

measurements in mm