

N 70, Canopy cooker hood, 86 cm, Black
D86NAC1S0B



Canopy hood: designed to fit neatly under an overhead unit or cabinet. They're discreet and effectively use valuable space.

- ✓ Hidden Design: Seamlessly integrate your hood in a flush fitted cupboard design.
- ✓ High extraction rate - for continuously clean air in the kitchen.
- ✓ Reduced Noise: our optimised motor guarantees a quiet cooking experience.
- ✓ LED Lighting: clear illumination while you cook.
- ✓ Intensive Setting: the powerful way to beat intense steam during cooking, with automatic revert.

Features

Technical Data

Typology : Built-in/Built-under
 Length electrical supply cord : 150.0 cm
 Required niche size for installation (HxWxD) : 345mm x 676.0mm x 264mm mm
 Height of the appliance : 345 mm
 Minimum distance above an electric hob : 500 mm
 Minimum distance above a gas hob : 650 mm
 Net weight : 10.0 kg
 Type of control : Electronic
 Number of speed settings : 3-stages + intensive setting
 Maximum output air extraction : 600 m³/h
 Boost position output recirculating : 700 m³/h
 Maximum output recirculating air : 580 m³/h
 Boost position air extraction : 745 m³/h
 Maximum Air flow : 600 m³/h
 Number of lights : 2
 Noise level : 61 dB(A) re 1pW
 Diameter of air outlet : 120 / 150 mm
 Grease filter material : Washable aluminium
 EAN code : 4242004287216
 Connection Rating : 252 W
 Fuse protection : 3 A
 Voltage : 220-240 V
 Frequency : 50; 60 Hz
 Plug type : GB plug
 Installation typology : Built-in

Optional accessories

Z5135X3	Standard recirculation kit
Z511TD1X1	Long Life recirculation kit external
Z511XC1X6	Clean Air Plus recirc. kit external



Features

Design:

- Canopy hood
- Installation: Cabinet
- Flush-fitted installation for a seamless integration in wall cupboards.
- Suitable for ducted extraction and recirculation
- For recirculated extraction various recirculation kits are available as optional accessories.

Core Features:

- 2 x 1W LED lights
- Colour Temperature: 4000 K
- Light Intensity: 400 lux
- Capacitor motor
- 2 metal grease filter(s).

Comfort Features:

- Soft touch control with LED display
- 3 speeds plus intensive
- Automatic reset from intensive to normal setting after 6 min

Cleaning Comfort:

- metal grease filter dishwasher-safe
- Easy to clean smooth surfaces and materials.

Performance Exhaust:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 285 m³/h; noise level 45 dB (A) re1pW Speed 2: extraction rate 410 m³/h; noise level 51 dB (A) re1pW Speed 3: extraction rate 600 m³/h; noise level 61 dB (A) re1pW Intensive 1: extraction rate 745 m³/h; noise level 65 dB (A) re1pW
- Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D)
- Average Energy Consumption: 50.1 kWh/year*
- Blower Efficiency Class: A*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: D*

Performance Recirculation:

- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory): Speed 1: extraction rate 200 m³/h; noise level 59 dB (A) re1pW Speed 2: extraction rate 370 m³/h; noise level 71 dB (A) re1pW Speed 3: extraction rate 440 m³/h ; noise level 73 dB (A) re1pW Intensive Speed 1: extraction rate 460 m³/h; noise level 74 dB (A) re1pW
- According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with Clean Air plus recirculation kit, for chimless installation (available as optional accessory): Speed 1: extraction rate 270 m³/h ; noise level 51 dB (A) re1pW Speed 2: extraction rate 390 m³/h ; noise

level 71 dB (A) re1pW) Speed 3: extraction rate 580 m³/h ; noise level 69 dB (A) re1pW) Intensive Speed 1: extraction rate 700 m³/h ; noise level 74 dB (A) re1pW)

Technical Information and Sustainability:


- Consumption data:
- Power rating: 252 W
- Voltage: Nominal voltage: 220 - 240 V
- Sustainability:
- Environmentally friendly packaging
- Available odour filter as regenerative Long Life filter with 10 years lifetime

Planning and Installation Information:


- Dimensions (HxWxD): 345 x 860 x 282 mm
- Dimensions recirculating (HxWxD): 345-345 x 860 x 282 mm
- Built-in dimensions (HxWxD): 345 x 676 x 264 mm
- Please reference the built-in dimensions provided in the installation drawings
- Electrical cable length 1.5 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Back-pressure flap: Yes

Dimensioned drawings

Measurements in mm

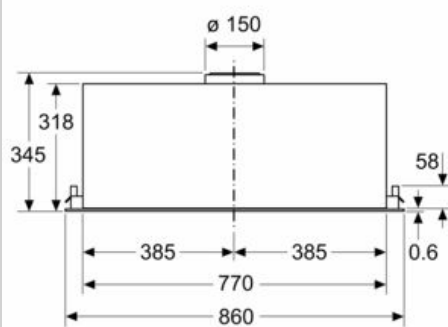

Measurements in mm

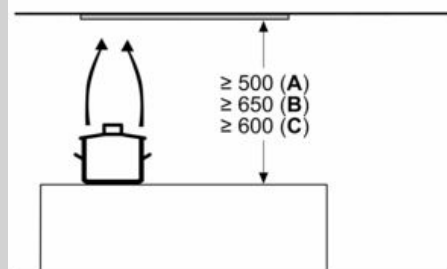


A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

Measurements in mm

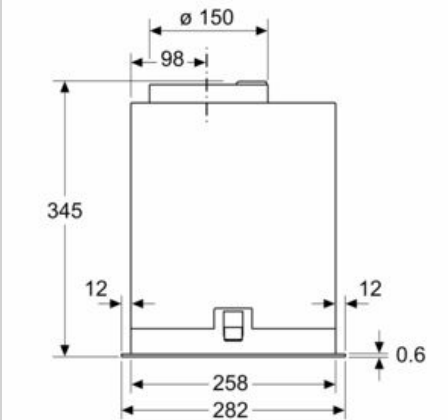

Measurements in mm

