


## iQ700, Domino gas hob, 30 cm, Ceramic, Black ER3A6BB70

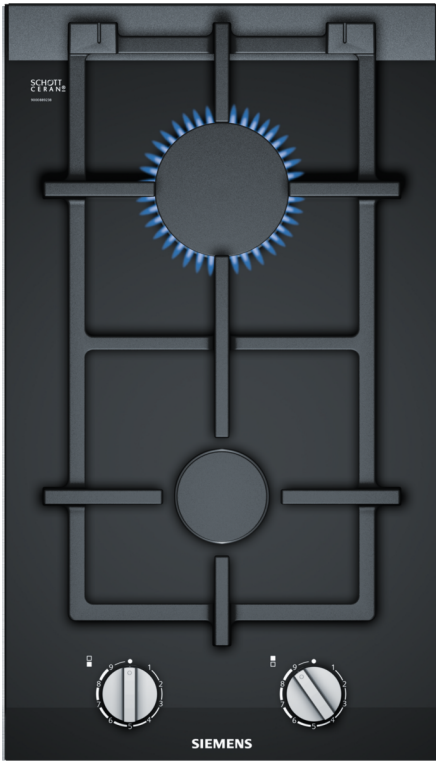

Gas cooktop with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology – Precise flame control with nine different settings.
- ✓ Dishwasher-proof pan supports – Cut the time you spend cleaning the hob.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.
- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.
- ✓ Siemens burner design is extremely flat in comparison to a standard burner.

Product name/family: .....Vario/Domino gas hob w control  
 Product name/family: .....Vario/Domino gas hob w control  
 Built-in / Free-standing: ..... Built-in  
 Built-in / Free-standing: ..... Built-in  
 Source of energy: ..... Gas  
 Source of energy: ..... Gas  
 Number of cooking zones: ..... 2  
 Number of cooking zones: ..... 2  
 Min. required niche size for installation (HxWxD): ..... 45 x 270 x 490-500 mm  
 Min. required niche size for installation (HxWxD): ..... 45 x 270 x 490-500 mm  
 Width of the appliance: ..... 302 mm  
 Width of the appliance: ..... 302 mm  
 Dimensions: ..... 47x302x520 mm  
 Dimensions: ..... 47x302x520 mm  
 Dimensions of the packed product (HxWxD): ... 190 x 380 x 580 mm  
 Dimensions of the packed product (HxWxD): ... 190 x 380 x 580 mm  
 Weight: ..... 6.2 kg  
 Weight: ..... 6.2 kg  
 Gross weight: ..... 7.1 kg  
 Gross weight: ..... 7.1 kg  
 Residual heat indicator: ..... Separate  
 Residual heat indicator: ..... Separate  
 Location of control panel: ..... Front  
 Location of control panel: ..... Front  
 Basic surface material: ..... Ceramic  
 Basic surface material: ..... Ceramic  
 Color of surface: ..... Black, Alu, brushed  
 Color of surface: ..... Black, Alu, brushed  
 Color of frame: ..... Black  
 Color of frame: ..... Black  
 Length electrical supply cord: ..... 100.0 cm  
 Length electrical supply cord: ..... 100.0 cm  
 EAN code: ..... 4242003925669  
 EAN code: ..... 4242003925669  
 Gas connection rating: ..... 4700 W  
 Gas connection rating: ..... 4700 W  
 Fuse protection: ..... 3 A  
 Fuse protection: ..... 3 A  
 Nominal power: ..... 220-240 V  
 Nominal power: ..... 220-240 V  
 Frequency: ..... 50; 60 Hz  
 Frequency: ..... 50; 60 Hz

HZ298105 Simmer plate  
 HZ298114 Small pot support  
 HZ394301 Connecting strip



## iQ700, Domino gas hob, 30 cm, Ceramic, Black ER3A6BB70

### Design

- ceramic glass surface, black
- Facette front, rear and side profiles, aluminium, brushed
- Cast iron pan supports
- Low profile burner: elegant burner design

### Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Pan supports dishwasher safe: clean without effort in the dishwasher.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

### Burners and power

- 2 burner gas hob including:
- Center front: Standard burner up to 1.9 KW (depending on gas type)
- Center rear: high-speed burner up to 2.8 KW (depending on gas type)

### Safety


- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- Residual heat indicator: indicates which burner parts and pan supports are still hot.

### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 47 x 302 x 520
- Required niche size for installation (HxWxD mm) : 45 x 270 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 4.7 KW


iQ700, Domino gas hob, 30 cm,  
Ceramic, Black  
ER3A6BB70

Measurements in mm

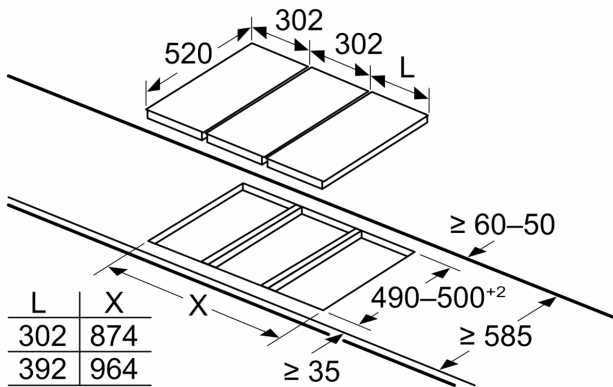


If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Measurements in mm

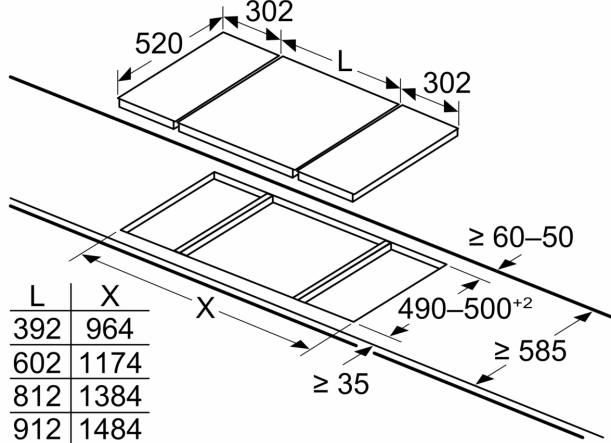

When installing two Domino units right next to a hob, two assembly kits (HZ394301) are required


Measurements in mm

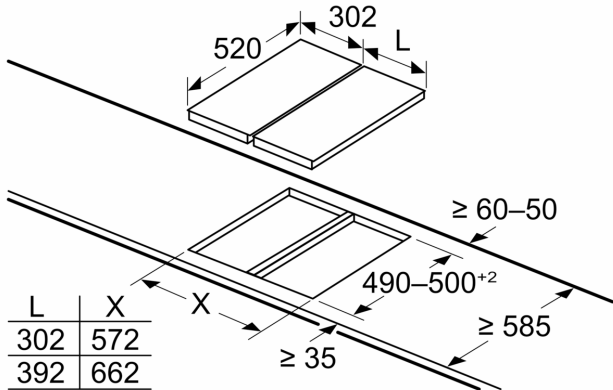

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Measurements in mm


**Assembly kit (HZ394301) for Domino**

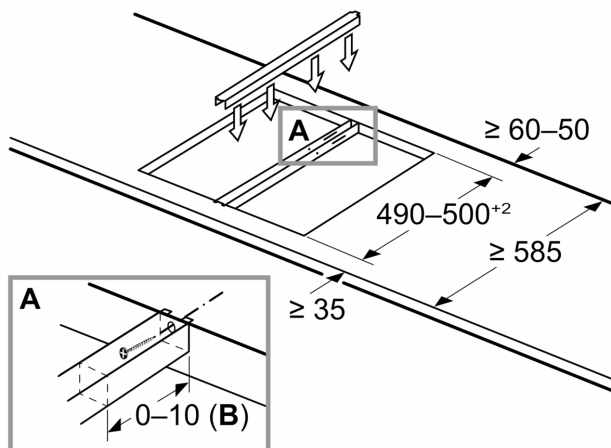

**B:** Dependent on the cut-out depth

Measurements in mm

Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions

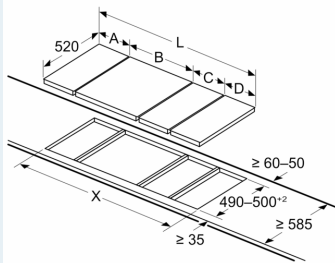

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Cutout dimension (X) depending on the combination (see combination table)


measurements in mm

Domino combination options with corresponding appliance and cut-out dimensions

Width category: 30 40 60 70 80 90  
Appliance width: 302 392 602 710 812 912

	A	B	C	D	L	X
2x30	302	302	-	-	604	572
1x30, 1x40	302	392	-	-	694	662
1x30, 1x60	302	602	-	-	904	872
1x30, 1x70*	302	710	-	-	1012	980
1x30, 1x80	302	812	-	-	1114	1082
1x30, 1x90	302	912	-	-	1214	1182
2x40	392	392	-	-	784	752
1x40, 1x60	392	602	-	-	994	962
1x40, 1x70*	392	710	-	-	1102	1070
1x40, 1x80	392	812	-	-	1204	1172
1x40, 1x90	392	912	-	-	1304	1272
3x30	302	302	302	-	906	874
2x30, 1x40	302	302	392	-	996	964
2x30, 1x60	302	302	602	-	1206	1174
2x30, 1x70*	302	302	710	-	1314	1282
2x30, 1x80	302	302	812	-	1416	1384
2x30, 1x90	302	302	912	-	1516	1484
1x30, 2x40	302	392	392	-	1086	1054
1x30, 1x40, 1x60	302	392	602	-	1296	1264
1x30, 1x40, 1x70*	302	392	710	-	1404	1372
1x30, 1x40, 1x80	302	392	812	-	1506	1474
1x30, 1x40, 1x90	302	392	912	-	1606	1574
3x40	392	392	392	-	1176	1144
2x40, 1x60	392	392	602	-	1386	1354
4x30	302	302	302	302	1208	1176
3x30, 1x40	302	302	302	392	1298	1266
2x30, 2x40	302	302	392	392	1388	1356
1x30, 3x40	302	392	392	392	1478	1446
1x30, 1x75	302	750	-	-	1052	1016
1x40, 1x75	392	750	-	-	1142	1106
2x30, 1x75	302	302	750	-	1354	1318
1x30, 1x40, 1x75	302	392	750	-	1444	1408

\* Not possible with 70 cm induction hob

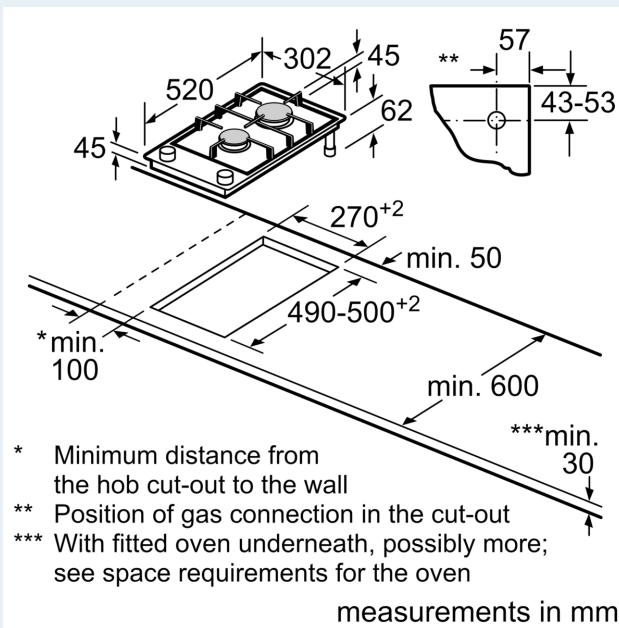

- \* Minimum distance from the hob cut-out to the wall
- \*\* Position of gas connection in the cut-out
- \*\*\* With fitted oven underneath, possibly more; see space requirements for the oven

measurements in mm