

DA 1260

Built-under cooker hood

with energy-efficient LED lighting and sliding switch for simple operation.



- Puristic design – space-saving solution 598 mm wide
- Powerful – 545 m3/h in Booster level
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation



EAN: 4002515792186 / Material number: 10568360 /
Old Material Number: 28126055GB

General information

Material number	10568360
EAN number	4002515792186

Construction type

Built-under hood	•
------------------	---

Operating modes

Type of air guide	Can be retrofitted
Active charcoal filter (order separately)	DKF 18-P

Design

Colour	Stainless steel
--------	-----------------

User convenience

Mechanical controls	•
Controls	Slide switch

Power levels (number without Booster level)

3

Booster levels

1

Efficiency and sustainability

Annual energy consumption in kWh/year

91.6

Energy efficiency class (A+++ – D)

C

AC motor

•

Annual energy consumption in kWh/year

91.6

Fluid dynamic efficiency class

D

Lighting efficiency class

A

Grease filtering efficiency class

A

Cleaning and care

Easy-to-clean canopy interior – CleanCover

•

Filter system

Number of dishwasher-safe stainless steel grease filters (10-ply)

2

Lighting

Number x W

2 x 3 W

Light intensity in Lx

330 lx

Colour temperature in K

3000 Kelvin

Fan

Single-action blower

•

Exhaust air

Air throughput in Level 1 (m³/h) according to EN 61591

275

Air throughput in Level 2 (m³/h) according to EN 61591

315

Air throughput in Level 3 (m³/h) according to EN 61591

355

Air throughput in Booster level 1 (m³/h) according to EN 61591

545

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3

57.0

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3

60.0

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3

64.0

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3

74.0

DA 1260

Built-under cooker hood

with energy-efficient LED lighting and sliding switch for simple operation.



EAN: 4002515792186 / Material number: 10568360 /
Old Material Number: 28126055GB

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 43.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 47.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 50.0

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 60.0

Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591 165

Air throughput in Level 2 (m³/h) according to EN 61591 180

Air throughput in Level 3 (m³/h) according to EN 61591 195

Air throughput in Booster level 1 (m³/h) according to EN 61591 220

Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3 71.0

Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3 72.0

Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3 73.0

Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3 75.0

Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13 58.0

Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13 59.0

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13 62.0

Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13 57.0

Technical data

Canopy width in mm 598

Canopy height in mm 125

Canopy depth in mm 500

Net weight in kg 11.2

Length of supply lead in m 1.5

Standard plug fitted •

Minimum height above electric hobs in mm 450

Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm 650

Number of phases 1

Total rated load in kW 0.23

Voltage in V 230

Fuse rating in A 10

Frequency in Hz 50

Installation notes

Extraction ducting connection at top •

Diameter of exhaust duct in mm 150

Fitting template •

Accessories included

Non-return flap •

DA 1260

Built-under cooker hood

with energy-efficient LED lighting and sliding switch for simple operation.



EAN: 4002515792186 / Material number: 10568360 /
Old Material Number: 28126055GB

Deflector for recirculation


Adapter to reduce ducting diameter from 150 mm to
125 mm Ø



DA 1260

Built-under cooker hood

with energy-efficient LED lighting and sliding switch for simple operation.

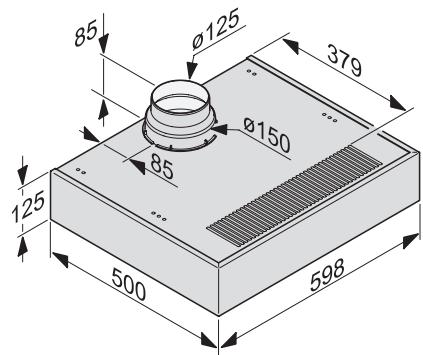

DA 1060, DA 1160, DA 1260 (Installation drawing)