

DA 2450

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use



- Customised kitchen design – fully integrated in 532 mm width
- Powerful – 590 m³/h on the booster setting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean – Miele CleanCover
- Suitable for every home – for extraction or recirculation

EAN: 4002515792209 / Material number: 10568390 /
Old Material Number: 28245055GB

General information	
Construction type	•
Integrated extractor	•
Operating modes	
Type of air guide	Can be retrofitted
Recirculation conversion kit (order separately)	DUU 151
Active charcoal filter (order separately)	DKF 15-P
Design	
Colour	Stainless steel
User convenience	
Electronic controls	•
Rotary knob	•
Controls	Rotary knobs
Power levels (number without Booster level)	2
Booster levels	1
Efficiency and sustainability	
Energy efficiency class (A+++ – D)	A
Annual energy consumption in kWh/year	52.6
AC motor	•
Annual energy consumption in kWh/year	52.6
Fluid dynamic efficiency class	A
Lighting efficiency class	A
Grease filtering efficiency class	B
Cleaning and care	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher-safe stainless steel grease filters (10-ply)	1
Lighting	
Number x W	2 x 3 W
Light intensity in Lx	330 lx
Colour temperature in K	3000 Kelvin
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m ³ /h) according to EN 61591	230
Air throughput in Level 2 (m ³ /h) according to EN 61591	350
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	590
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	54.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	66.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	32.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	40.0

DA 2450

Extractor unit

with energy-efficient LED lighting and rotary dials for easy use



EAN: 4002515792209 / Material number: 10568390 /
Old Material Number: 28245055GB

Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to 52.0
EN 60704-2-13

Recirculation

Air throughput in Level 1 (m³/h) according to EN 61591	185
Air throughput in Level 2 (m³/h) according to EN 61591	305
Air throughput in Booster level 1 (m³/h) according to EN 61591	525
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	52.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	61.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	71.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	47.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	57.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	38.0

Technical data

Canopy width in mm	532
Canopy height in mm	50
Canopy depth in mm	372
Net weight in kg	10.2
Length of supply lead in m	1.5
Standard plug fitted	•
Minimum height above electric hobs in mm	450
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0.22
Voltage in V	230
Fuse rating in A	10
Frequency in Hz	50


Installation notes

Extraction ducting connection at top	•
Extraction ducting connection at rear	•
Extraction connection at top and rear	•
Diameter of exhaust duct in mm	150

Accessories included

Non-return flap	•
-----------------	---

DA 2450
Extractor unit
with energy-efficient LED lighting and rotary dials for easy use

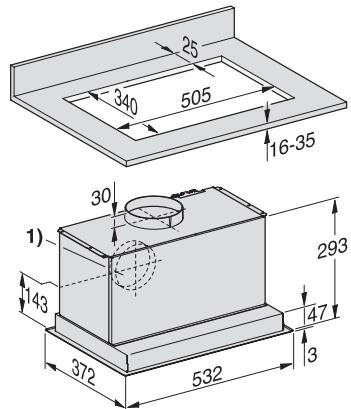

DA2450, DA2450-1, DA2558 (Installation drawing)

1) Vent connection alternatively to rear, You will find further detailed measurements in the instructions for use!