

DAZ 1620

Slot-in cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.



- Invisible – can be concealed with kitchen décor
- Powerful – ?? in Booster level
- Energy-efficient and uniform illumination – 2 LED spotlights
- Safe and easy to clean – Miele CleanCover
- For perfect functionality – accessories for proper venting



EAN: 4002516852599 / Material number: 12697770 /
Old Material Number: 28Z1620SGB

Construction type	
Slot-in cooker hood	•
Operating modes	
Type of air guide	Can be retrofitted
Design	
Colour	Stainless steel (PF)
User convenience	
Electronic controls	•
Controls	Light-touch switches with LEDs
Power levels (number without Booster level)	3
Booster levels	1
Efficiency and sustainability	
Energy efficiency class (A+++ – D)	B
AC motor	•
Annual energy consumption in kWh/year	75.9
Fluid dynamic efficiency class	B
Lighting efficiency class	A
Grease filtering efficiency class	B
Filter system	
Number of dishwasher-safe metal grease filters	2
Lighting	
Number x W	2 x 1,0 W
Light intensity in lx	170 lx
Fan	
Dual-action blower	•
Exhaust air	
Air throughput in Level 1 (m³/h) according to EN 61591	300
Air throughput in Level 2 (m³/h) according to EN 61591	470
Air throughput in Level 3 (m³/h) according to EN 61591	620
Air throughput in Booster level 1 (m³/h) according to EN 61591	730
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	47.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	58.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	64.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	68.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	39.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	49.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	55.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	59.0
Recirculation	
Air throughput in Level 1 (m³/h) according to EN 61591	255

DAZ 1620

Slot-in cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.



EAN: 4002516852599 / Material number: 12697770 /
Old Material Number: 28Z1620SGB

Air throughput in Level 2 (m ³ /h) according to EN 61591	355
Air throughput in Level 3 (m ³ /h) according to EN 61591	410
Air throughput in Booster level 1 (m ³ /h) according to EN 61591	430
Sound power in Level 1 (dB(A) re 1 pW) according to EN 60704-3	64.0
Sound power in Level 2 (dB(A) re 1 pW) according to EN 60704-3	71.0
Sound power in Level 3 (dB(A) re 1 pW) according to EN 60704-3	74.0
Sound power in Booster level 1 (dB(A) re 1 pW) acc. to EN 60704-3	75.0
Sound pressure in Level 2 (dB(A) re 20 µPa) according to EN 60704-2-13	62.0
Sound pressure in Level 3 (dB(A) re 20 µPa) according to EN 60704-2-13	65.0
Sound pressure in Booster level 1 (dB(A) re 20 µPa) acc. to EN 60704-2-13	66.0
Sound pressure in Level 1 (dB(A) re 20 µPa) according to EN 60704-2-13	55.0

Technical data

Canopy width in mm	599
Canopy height in mm	450
Canopy depth in mm	275
Net weight in kg	11.8
Length of supply lead in m	1.2
Standard plug fitted	•
Minimum height above electric hobs in mm	650
Minimum safety distance above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Number of phases	1
Total rated load in kW	0.25
Voltage in V	230
Fuse rating in A	5
Frequency in Hz	50

Installation notes

Extraction ducting connection at top	•
Diameter of exhaust duct in mm	150
Fitting template	•


Accessories included

Non-return flap	•
-----------------	---

DAZ 1620

Slot-in cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.

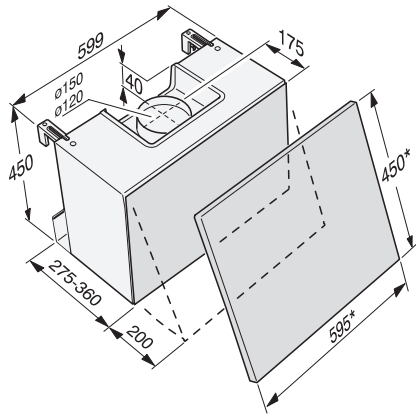

DA1867, DAZ1620 (Installation drawing)

* Measurements of furniture front