

*N 70, BUILT-IN FRIDGE, 177.5 X 56 CM, SOFT CLOSE
FLAT HINGE
K18160EO*



This built-in refrigerator keeps food at its freshest thanks to the Fresh Safe system, ideal air circulation Eco Air Flow and flexible storage options.

- ✓ Fresh Safe 2 – Ideal storage for fruit and veg.
- ✓ Bottle Flex Shelf – A bottle holder and shelf in one.
- ✓ Soft Close – Enjoy the silence. The door softly closes itself when at an angle of 20 degrees.
- ✓ Adjustable Glass Shelves – Height adjustable shelves create the space you need for inspiring dishes in your fridge
- ✓ Easy Access Shelf – Slides out for easier access to items in your fridge.

Energy Efficiency Class:E
 Average annual energy consumption in kilowatt hour per year (kWh/a): 115 kWh/a
 Sum of volume of frozen compartments: 0 l
 Sum of volume of chill compartments: 319 l
 Airborne acoustical noise emissions : 37 dB(A) re 1pW
 Airborne acoustical noise emission class: C
 Built-in / Free-standing: Built-in
 Door panel options: Not possible
 Height: 1772 mm
 Width of the appliance: 558 mm
 Depth: 545 mm
 Min. required niche size for installation (HxWxD): .. 1775.0 x 560 x 550 mm
 Net weight: 64.2 kg
 Connection Rating: 90 W
 Fuse protection: 10 A
 Door hinge: Right reversible
 Voltage: 220-240 V
 Frequency: 50 Hz
 Length electrical supply cord: 230.0 cm
 Number of compressors: 1
 Number of independent cooling systems: 1
 Interior ventilator: Yes
 Reversible Door Hinge: Yes
 Number of Adjustable Shelves in fridge compartment: 6
 Shelves for Bottles: No
 EAN code: 4242004267720
 Brand: Neff
 Product name / Commercial code: K18160EO
 Product category: Refrigerator
 Frost free system: No
 Installation typology: Full-integrated
 Included accessories: 1 x Heavy-duty hinge support



4 242004 267720

1 x Heavy-duty hinge support

KS1860Z0 Wire Shelf
 KSGG0MZ0 Butter box
 Z10020 Bottle Rack

N 70, BUILT-IN FRIDGE, 177.5 X 56 CM, SOFT CLOSE
FLAT HINGE
K18160EO

- Built-in fridge
- easy Installation

- Fixed hinge, SoftClose door - dampens door movement, for smooth and effortless closure

Performance and Consumption

- EU19_EEK_D: E
- Total Volume : 319 l
- Net Fridge Volume : 319 l
- Net Freezer Volume : 0 l
- Annual Energy Consumption: 115 kWh/a
- Climate Class: SN-ST
- EU19_Fast freezer facility_D
- Noise Level : 37 dB , EU19_Noise emission class_D: C

Functions

- Easy clean interior
- LED with Soft Start in fridge section

Design features

- Single cooling circuit
- LED Electronic control

Design features

- 6 safety glass shelves in fridge compartment of which 6 are height adjustable
- 10 door bins
- Door shelves in fridge door: 2 large and 0 small.
- 2 removable door storage compartments.

Freshness System

- 1 FreshSafe 2 drawer on telescopic rails; High humidity retains nutrients up to twice as long.
- 1 FreshSafe drawer on rails - The ideal place to store your fruit and vegetables safely.

Dimension and installation

- Dimensions: 177.2 cm H x 55.8 cm W x 54.5 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D

Key features - Fridge section

- Connection value 90 W
- 220 - 240 V

Key features - Freezer section

- Heavy-duty hinge support

Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.


Design features

Dimension and installation


Additional features

- Super Cooling: automatic deactivation
- Length of power cord: 230 cm
- Fully integrated


N 70, BUILT-IN FRIDGE, 177.5 X 56 CM, SOFT CLOSE
FLAT HINGE
K118160EO

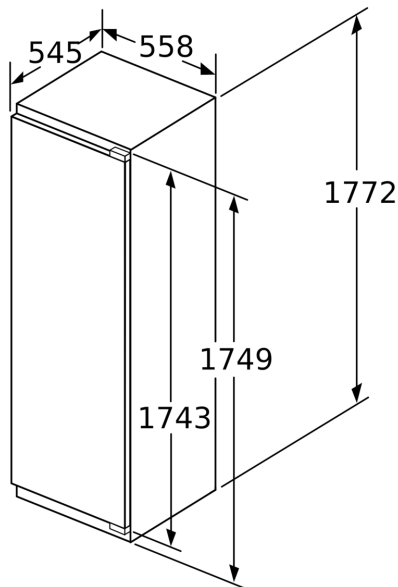

measurements in mm

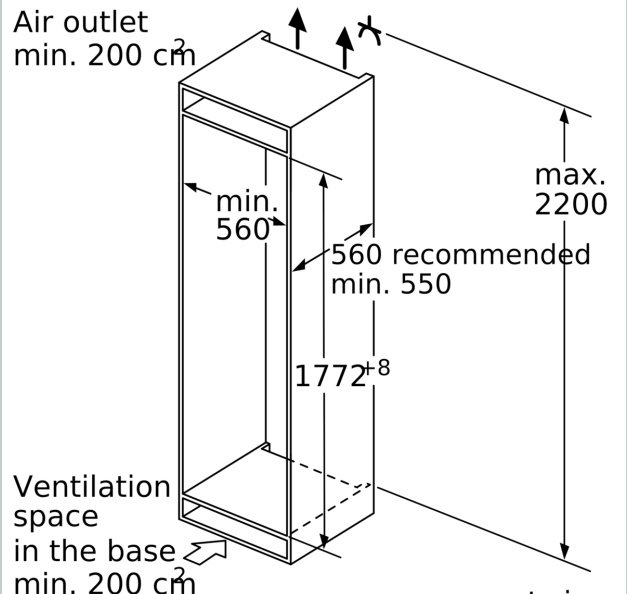


measurements in mm

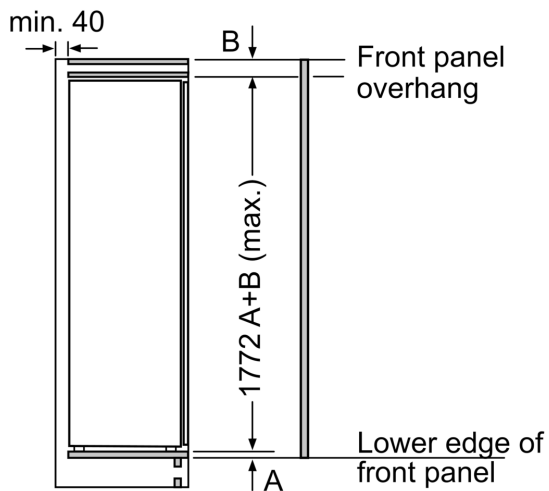

measurements in mm

Maximal permissible weight of the unit fronts




Fitted kitchen unit doors that exceed the permissible weight may cause damage and result in functional impairment of the hinges.

T: Includes height of appliance door Hinges in mm:	undamped hinge, Door in kg:	damped hinge, Door in kg:
1500-1750	22	22

measurements in mm

Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.