


iQ300, Canopy cooker hood, 53 cm, Silver metallic
LB55565GB

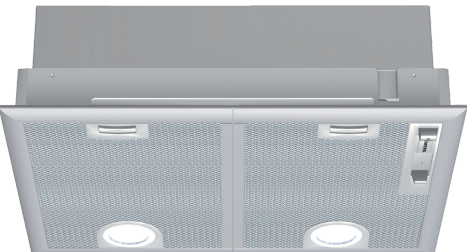

LZ73050	Standard odor filter
LZ74020	Installation kit for canopy

The powerful canopy cooker hood is concealed in a unit above the hob.

✓ LED lights: for optimal visibility and ambience while cooking.

Typology: Built-in/Built-under
Length electrical supply cord: 130.0 cm
Min. required niche size for installation (HxWxD): 255mm x 500.0mm x 350mm mm
Minimum distance above an electric hob: 650 mm
Minimum distance above a gas hob: 650 mm
Weight: 7.5 kg
Control panel: mechanical
Number of speed settings: 3-stages + intensive setting
Maximum output air extraction: 363 m³/h
Boost position output recirculating: 395.0 m³/h
Maximum output recirculating air: 268 m³/h
Boost position air extraction: 618 m³/h
Maximum Air flow: 363 m³/h
Number of lights: 2
Noise level: 56 dB(A) re 1pW
Diameter of air outlet: 120 / 150 mm
Grease filter material: Washable aluminium
EAN code: 4242003838396
Connection Rating: 206 W
Fuse protection: 10 A
Nominal power: 220-240 V
Frequency: 50 Hz
Plug type: GB plug
Installation type: Built-in



iQ300, Canopy cooker hood, 53 cm, Silver metallic LB55565GB

Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 618 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 56 dB dB*

Features

- Slider switch control for extractor speeds and light
- 3 x power levels plus intensive setting
- Twin motors
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 x metal grease filter cassettes

Design

- For installation under an overhead canopy kitchen unit
- Canopy hood
- Mechanical

Performance/technical information


- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use: 362 m³/h
- Intensive: 618 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 56 dB(A) re 1 pW
- Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 438 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 530 x 380 mm
- Dimensions recirculating, chimney (HxWxD): 255-255 x 530 x 380 mm
- Built-in dimensions (HxWxD): 255 x 500 x 350 mm
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 79.8 kWh/year*

Optional accessories


- Recirculating kit LZ73050

* In accordance with the EU-Regulation No 65/2014


iQ300, Canopy cooker hood, 53
cm, Silver metallic
LB55565GB

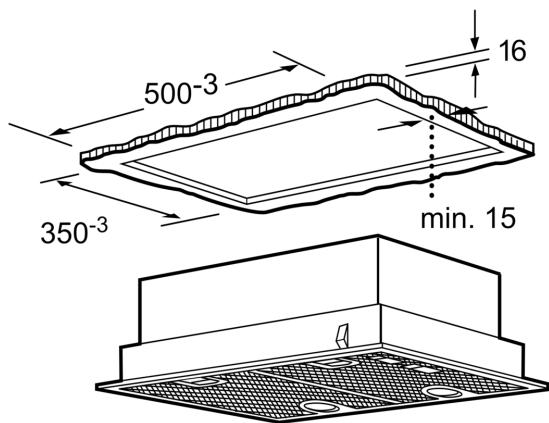


measurements in mm

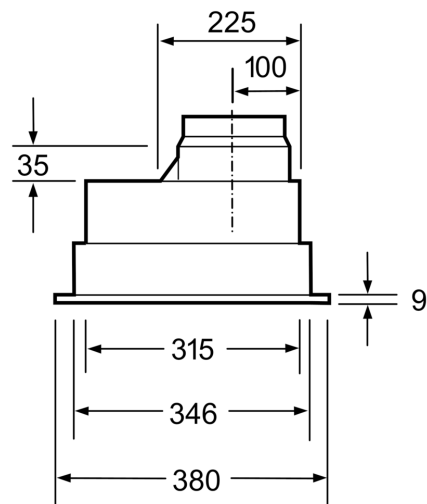

measurements in mm

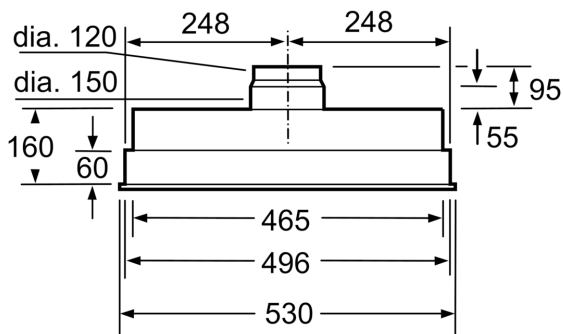

measurements in mm

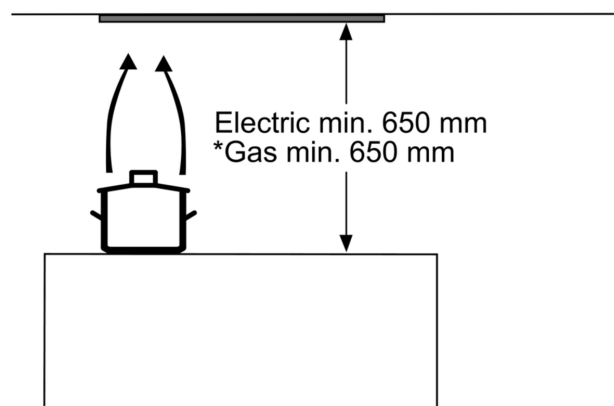

* from upper edge of pan support

measurements in mm