


iQ300, Canopy cooker hood, 75 cm, Silver metallic
LB75565GB

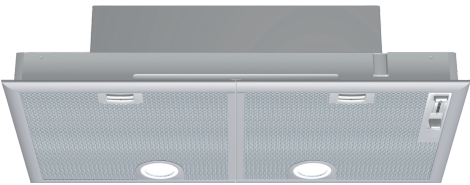

LZ73050	Standard odor filter
LZ74020	Installation kit for canopy

The powerful canopy cooker hood is concealed in a unit above the hob.

✓ LED lights: for optimal visibility and ambience while cooking.

Typology:	Built-in/Built-under
Length electrical supply cord:	130.0 cm
Min. required niche size for installation (HxWxD):	255mm x 700.0mm x 350mm mm
Minimum distance above an electric hob:	650 mm
Minimum distance above a gas hob:	650 mm
Weight:	9.4 kg
Control panel:	mechanical
Number of speed settings:	3-stages + intensive setting
Maximum output air extraction:	379 m³/h
Boost position output recirculating:	408.0 m³/h
Maximum output recirculating air:	278 m³/h
Boost position air extraction:	638 m³/h
Maximum Air flow:	379 m³/h
Number of lights:	2
Noise level:	56 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242003838419
Connection Rating:	206 W
Nominal power:	220-240 V
Frequency:	50 Hz
Plug type:	GB plug
Installation type:	Built-in

4 242003 838419

iQ300, Canopy cooker hood, 75 cm, Silver metallic LB75565GB

Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 638 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 56 dB dB*

Features

- Slider switch control for extractor speeds and light
- 3 x power levels plus intensive setting
- Twin motors
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 x metal grease filter cassettes

Design

- For installation under an overhead canopy kitchen unit
- Canopy hood
- Mechanical

Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 379 m³/h
- Intensive 638 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 56 dB(A) re 1 pW
- Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 410 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 730 x 380 mm
- Dimensions recirculating, chimney (HxWxD): 255-255 x 730 x 380 mm
- Built-in dimensions (HxWxD): 255 x 700 x 350 mm
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 81.2 kWh/year*

Optional accessories

- Recirculating kit LZ73050

* In accordance with the EU-Regulation No 65/2014

iQ300, Canopy cooker hood, 75
cm, Silver metallic
LB75565GB

