

iQ100, Wall-mounted cooker hood, 60 cm, clear glass black printed, Black LC65KDK60B



The Inclined Hood with touchControl and a low-noise motor for an odor-and noise-free kitchen.

- ✓ Intensive setting revert - increased power when steam escapes, and an automatic revert after a few minutes.
- ✓ Quiet and powerful extraction for a peaceful kitchen.
- ✓ Illuminate your cooking space with LED lights for optimal visibility and ambience setting.
- ✓ touchControl: quickly and easily manage the power levels and the LED light
- ✓ Filter saturation - Automatic reminders to clean and replace the filters ensure performance.

Features

Technical Data

Color chimney: Black
Typology: Wall-mounted
Length electrical supply cord: 150 cm
Height of the appliance: 325 mm
Minimum distance above an electric hob: 450 mm
Minimum distance above a gas hob: 650 mm
Weight: 11.2 kg
Control panel: Electronic
Number of speed settings: 3-stages + intensive setting
Maximum output air extraction: 430 m³/h
Boost position output recirculating: 550.0 m³/h
Maximum output recirculating air: 445 m³/h
Maximum Air flow: 430 m³/h
Number of lights: 2
Noise level: 60 dB(A) re 1pW
Diameter of air outlet: 150 mm
Grease filter material: Washable aluminium
EAN code: 4242003977156
Connection Rating: 223 W
Fuse protection: 4 A
Nominal power: 220-240 V
Frequency: 50 Hz
Plug type: GB plug
Installation type: Wall-mounted

Optional accessories

LZ11GKU13 Standard recirculation kit




iQ100, Wall-mounted cooker hood, 60 cm, clear glass black printed, Black
LC65KDK60B

Features	
Design: • Inclined glass common design • wall-mounted • Black glass • Suitable for ducted and re-circulating operation • For recirculated extraction recirculating kit (accessory) needed Core Features: • Capacitor motor • 2 x LED lights • Colour Temperature: 4000 K • Light Intensity: 127 lux • 1 metal grease filter(s). Comfort Features: • Electronic control via touchControl, backlighted • 3 x power levels plus intensive setting • Automatic reset from intensive to normal setting after 5 min • Grease and charcoal filter saturation indicators Cleaning Comfort: • Large opening angle of the glass plate with locking function for an easy filter accessibility and easy cleaning. • Easy to clean smooth surfaces and materials. • Steel filter cover dishwasher-safe Performance Exhaust: • According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in exhaust mode: Speed 1: extraction rate 220 m3/h; noise level 46 dB (A) re1pW Speed 2: extraction rate 315 m3/h; noise level 53 dB (A) re1pW Speed 3: extraction rate 430 m3/h; noise level 60 dB (A) re1pW Intensive 1: extraction rate 550 m3/h; noise level 65 dB (A) re1pW • Energy Efficiency Class: A (at a range of energy efficiency classes from A+++ to D) • Average Energy Consumption: 43.8 kWh/year* • Blower Efficiency Class: A* • Lighting Efficiency Class: A* • Grease Filtering Efficiency Class: E* Performance Recirculation: • According to EN 61591 and EN/ IEC 60704-2-13 your appliance can achieve the following values in recirculation mode with standard recirculation kit (available as optional accessory): Speed 1: extraction rate 215 m3/h; noise level 51 dB (A) re1pW Speed 2: extraction rate 300 m3/h; noise level 61 dB (A) re1pW Speed 3: extraction rate 445 m3/h ; noise level 69 dB (A) re1pW Intensive Speed 1: extraction rate550 m3/h; noise level 72 dB (A) re1pW) Technical Information and Sustainability: • Consumption data: • Power rating: 223 W • Voltage: Nominal voltage: 220 - 240 V	Planning and Installation Information: • Dimensions exhaust air (HxWxD): 690-900 x 590 x 325 mm • Dimensions recirculating (HxWxD): 720-975 x 590 x 325 mm • Diameter pipe Ø 150 mm • Electrical cable length 1.5 m • Back-pressure flap: Yes


iQ100, Wall-mounted cooker hood, 60 cm, clear glass black printed, Black
LC65KDK60B

Dimensioned drawings


Measurements in mm
Appliance in exhaust air mode

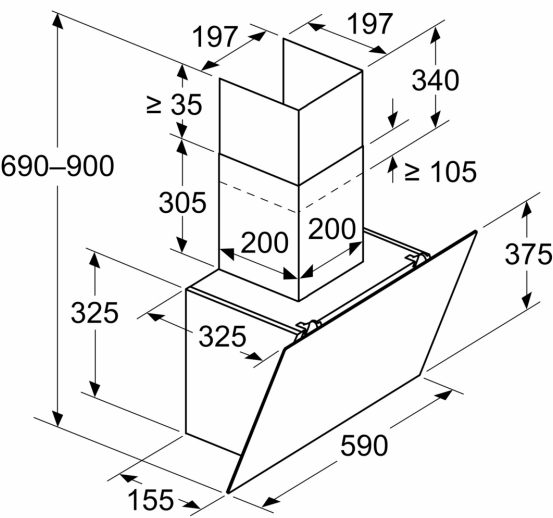

Measurements in mm
Appliance in circulated air mode

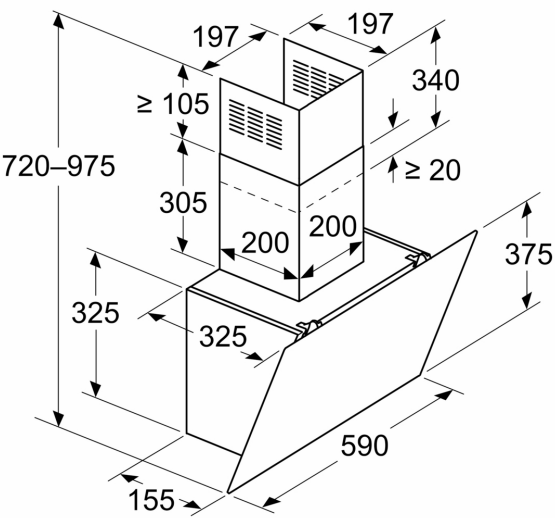


Measurements in mm

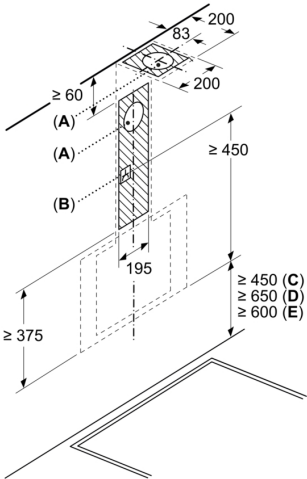

- A: Exhaust-air outlet
B: Socket
C: Electric
D: Gas - from upper edge of pan support
E: Electric - for Australia and New Zealand

Measurements in mm
Wall installation with chimney

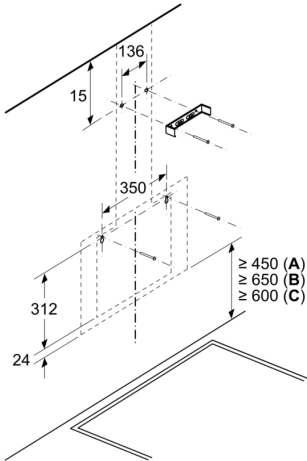

- A: Electric
B: Gas - from upper edge of pan support
C: Electric - for Australia and New Zealand

Dimensioned drawings

