


Series 6, Gas hob, 60 cm, Black  
PCP6A6B90

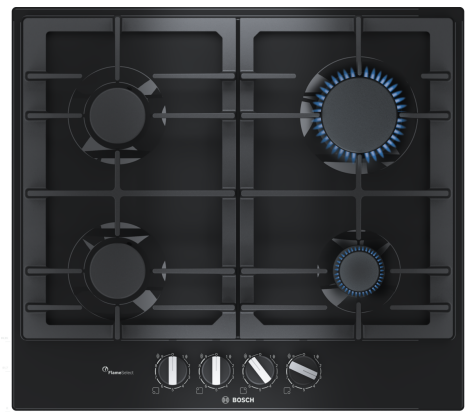

HEZ298105    Simmer plate  
HEZ298115    Small pot support

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Continuous cast-iron pan support:** for high firmness and stability of cookware.
- **Biomethane-ready:** your gas hob can also be powered with renewable biomethane gas.
- **Ergonomic control knobs with raised center for precise adjustments.**
- **Surface colour: elegant black enamel design.**

Appliance type: ..... gas hob w integrated controls  
Built-in / Free-standing: ..... Built-in  
Heating type: ..... Gas  
Number of cooking zones: ..... 4  
Type of control setting devices: ..... sword knobs  
Min. required niche size for installation (HxWxD): ..... 45 x 560-562 x 480-492 mm  
Width of the appliance: ..... 582 mm  
Dimensions: ..... 53x582x520 mm  
Dimensions of the packed product (HxWxD): ..... 141 x 651 x 578 mm  
Net weight: ..... 11.2 kg  
Gross weight: ..... 12.0 kg  
Residual heat indicator: ..... without  
Location of control panel: ..... Front  
Basic surface material: ..... Enamel  
Color of surface: ..... Black  
Length electrical supply cord: ..... 100.0 cm  
EAN code: ..... 4242002914404  
Gas connection rating: ..... 7500 W  
Fuse protection: ..... 3 A  
Voltage: ..... 220-240 V  
Frequency: ..... 60; 50 Hz



## Series 6, Gas hob, 60 cm, Black PCP6A6B90

---

### Design

- Enamel surface, Black
- Cast iron pan supports

### Usage convenience

- FlameSelect: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

### Burners and power

- 4 gas burners:
- Left front: standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: high-speed burner up to 3 KW (depending on gas type)
- Right front: economy burner up to 1 KW (depending on gas type)

### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

### Installation (gas types & measurements)

- Usable for: Liquid gas G30,31 28-30/37mbar
- Nat gas L/LL G25/20mbar(DE) NG H/E 20mbar, E+ 20/25mbar  
Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Pre-set for natural gas
- Nozzle set for LPG jets included. Connection to 28-30/37 mbar bottled gas. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 582 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 492)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 7.5 KW

**Series 6, Gas hob, 60 cm, Black**  
**PCP6A6B90**

